

RANGE COMPOSITION

The range consists of 7 fan assisted models of 1300 litres refrigeration cabinets that offer excellent standards in terms of performance and efficiency. These models come in fridge, positive and negative versions, with a choice of materials (304 AISI, 430 AISI or white painted steel) and are available with full doors.

Model RS13DX2F is constructed with two separate cells (650+650 litres) with different range of temperature.



726475

AU SERIES

1300 LT DIGITAL REFRIGERATORS

ZANUSSI
PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external structure in 304 AISI, 430 AISI or white painted steel, top and back in galvanized steel. 150 mm high - adjustable feet.
- ◆ Digital control panel allowing the easy and precise setting and control of the internal temperature.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water (304 AISI models), manual emptying of defrost water (430 AISI models).
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature)
- ◆ Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.
- ◆ High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional,

long-term insulation and notable energy savings.

TECHNICAL DATA							
CHARACTERISTICS	MODELS						
	RS13P42F 726462	RS13PX2F 726459	RS13RX2F 726321	RS13PW2F 726475	RS13DX2F 726335	RS13R32F 726467	RS13RX4H 727157
Operating temperature							
first compartment - min/max °C	0 / 10	0 / 10	-2 / 10	0 / 10	-2 / 10	-2 / 10	-2 / 10
second compartment - min/max °C					-2 / 10		
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of stainless steel							
external	Stainless Steel	304 AISI	304 AISI	Prepainted Steel	304 AISI	304 AISI	Stainless Steel AISI 304 Scotch Brite
internal	Stainless Steel	304 AISI	304 AISI	Stainless Steel	304 AISI	304 AISI	Stainless Steel AISI 304 Scotch Brite
Gross capacity (D.I.N. 8952) - l.	1300	1300	1300	1300	650, 650	1300	1300
External dimensions - mm							
width	1440	1440	1440	1440	1440	1440	1440
depth/with open doors	788, 1440	788, 1440	788, 1440	788, 1440	788, 1440	788, 1440	788, 1450
height	2000	2000	2000	2000	2000	2000	2000
Min/Max internal humidity - %	85	85	78	85	68	78	78
N° and type of door	2	2	2	2	2	2	4x1/2
Door hinges	1 Left+1 Right	1 Left+1 Right	1 Left+1 Right	1 Left+1 Right	1 Left+1 Right	1 Left+1 Right	2 Left+2 Right
N° and type of grids (included)	6, GN 2/1	6, GN 2/1	6, GN 2/1	6, GN 2/1	6, GN 2/1	6, GN 2/1	8, GN 2/1
N° defrost in 24 hrs.	4	4	4/20'	4	4/20'	4/20'	4/20'
Refrigerant type	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	310	310	310	310	130, 130	310	310
Refrigeration power - W	791	791	791	791	663	791	791
Power - kW							
installed-electric	0.464	0.464	0.445	0.464	0.66	0.445	0.445
Internal light					●	●	
Net weight - kg.	217	217	217	217	250	217	217
Power supply - V, phases, Hz	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50
INCLUDED ACCESSORIES							
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	6	6	6	6	6	6	
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.							8
2/1 GN GREY "RILSAN" GRID	6	6	6	6	6	6	8


- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy. All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- ◆ Stainless steel feet (plastic interior).
- ◆ A wide range of optional accessories are available.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are CE marked.

OPTIONAL ACCESSORIES							
ACCESSORIES	MODELS						
	RS13P42F 726462	RS13PX2F 726459	RS13RX2F 726321	RS13PW2F 726475	RS13DX2F 726335	RS13R32F 726467	RS13RX4H 727157
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456	881456	881456	881456	881456	881456	
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.							880557
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539	880539	880539	880539	880539
2/1 GN AISI 304 S/S GRID	881067	881067	881067		881067	881067	881067
2/1 GN GREY "RILSAN" GRID	880720	880720	880720	880720	880720	880720	880720
3 RILSAN CENTR.GRIDS-2 DOOR REF/FREEZERS	880211	880211	880211	880211		880211	
ENERGY FREE ALARM DEVICE	881089	881089	881089	881089			881089
GN 2/1 WIRE BASKET-H-150 MM+SIDE RUNNERS	881467	881467	881467	881467		881467	
KIT 11 PASTRY TRAYS(400X600)-HD&SB REFR	880193	880193	880193	880193		880193	
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205	880205	880205
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451	881451	881451	881451	881451	881451	
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457	881457	881457



www.zanussiprofessional.com

726462, 726467, 726335, 726475, 726321, 726459

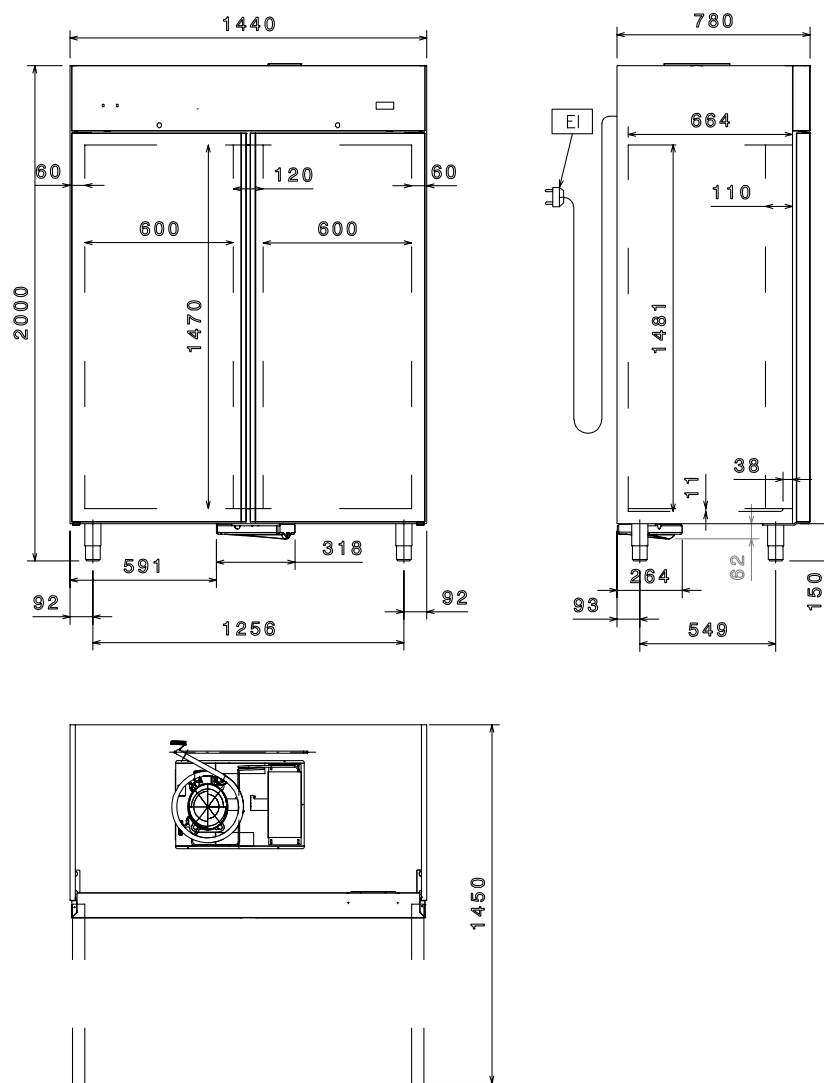

LEGEND						
	RS13P42F 726462	RS13PX2F 726459	RS13RX2F 726321	RS13PW2F 726475	RS13DX2F 726335	RS13R32F 726467
EI - Electrical connection	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50



www.zanussiprofessional.com