

## RANGE COMPOSITION

The Zanussi 160 liter is the solution for customers needing reliable, compact and easy to use cold storage. All the internal finishings are in commercial grade High Impact Polystyrene (HIPS). The range consists of 6 undercounter refrigerators and freezer models, in stainless steel or pre-painted with full or glass door.



TZT224

## AG SERIES

### 160 LT REFRIGERATORS/FREEZERS ZANUSSI PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ All models require only 1 phase 220/240V supply. They can therefore be plugged straight into an existing power socket.
- ◆ Adjustable front feet.
- ◆ Reversible door.
- ◆ The runners for the shelves are thermoformed and incorporated in the inner structure therefore being easily cleanable.
- ◆ The whole interior cell is in white High Impact Polystyrene (HIPS), has rounded corners, and has no joints to eliminate dirt traps.
- ◆ IP23 protection index make it possible to clean the unit with a hose at standard pressure.
- ◆ Designed to operate at ambient temperatures up to 43°C (32°C for the glass door model).
- ◆ Very quiet operation: noise level less than 45 dB (A).


TECHNICAL DATA						
CHARACTERISTICS	MODELS					
	RUCR16X1 727030	RUCR16G1V 727031	RUCR16W1 727046	RUCR16W1V 727047	RUCF16X1C 727228	RUCF16W1C 727222
Operating temperature						
first compartment - min/max °C	2 / 10	2 / 10	2 / 10	2 / 10	-24 / -15	-24 / -15
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Static	Static
External panels						
side panels	Prepainted Steel	Prepainted Steel	Prepainted white	Prepainted white	Prepainted Steel	Prepainted white
top panel	Grey ABS	Grey ABS	White ABS	White ABS	Grey ABS	White ABS
External material						
door	Stainless Steel	Glass	Prepainted white	Glass	Stainless steel antifingerrip	Prepainted white
Internal material						
panels	High Impact White Polystyrene	High Impact White Polystyrene	High Impact White Polystyrene	High Impact White Polystyrene	High Impact White Polystyrene	High Impact White Polystyrene
Gross capacity (D.I.N. 8952) - l.	165	165	165	165	110	110
Cooling unit	Built-In	Built-In	Built-In	Built-In	Built-In	Built-In
Control type	Mechanical	Mechanical	Mechanical	Mechanical	Electronic	Electronic
External dimensions - mm						
width	600	600	600	600	600	600
depth/with open doors	637	637	637	637	637	637
height	850	850	850	850	825	825
height adjustment	10	10	10	10	10	10
Min/Max internal humidity - %	51	51	51	51		
N° and type of door	1	1	1	1	1	1
Door hinges	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side
N° and type of grids (included)	3	3	3	3		
Refrigerant type	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	65	65	65	65	110	110
Refrigeration power - W	153	153	153	153	153	153
Refrigerant power						
at evaporation temperature - °C	-12	-12	-12	-12	-30	-30
Power - kW						
installed-electric	0.17	0.14	0.17	0.14	0.12	0.12
Noise level - dBA	45	45	45	45	45	45
Net weight - kg.	50	50	50	50	50	50

- ◆ Simple control panel.
- ◆ Digital temperature display (except for the glass door models) and electromechanical control.
- ◆ Door lock on all models and internal light only on refrigerator models.
- ◆ Compact cooling unit easily accessible from the rear of the appliance.
- ◆ Automatic defrost (manual for the freezer models) and automatic evaporation of defrost water.
- ◆ CFC and HCFC free insulation.
- ◆ R134 gas in refrigeration circuit.
- ◆ Developed and produced in ISO 9001 and ISO 14001 certified factory.

OPTIONAL ACCESSORIES						
ACCESSORIES	MODELS					
	RUCR16X1 727030	RUCR16G1V 727031	RUCR16W1 727046	RUCR16W1V 727047	RUCF16X1C 727228	RUCF16W1C 727222
3 BASKETS (RILSAN) FOR 160L UNDERC.FREEZER					880189	880189
BOTTLE HOLDER FOR 3 BOTTLES-160L REFR.	880159	880159	880159	880159		
DOOR COVERING KIT FOR 160L UC REFRIGER.	880145		880145			
SET 3 GRIDS FOR 160L UNDERC.REFRIG.-GREY	880151	880151				
SET 3 GRIDS-160L UNDERC.REF.-WHITE/GLASS			880150	880150		
STACKING KIT FOR 160L UNDERC.REFR.-GREY	880146	880146				
STACKING KIT FOR 160L UNDERC.REFR.-WHITE			880148	880148		
WALL HANGING KIT FOR 160L UNDERC. REFRIG	880149	880149	880149	880149		



[www.zanussiprofessional.com](http://www.zanussiprofessional.com)


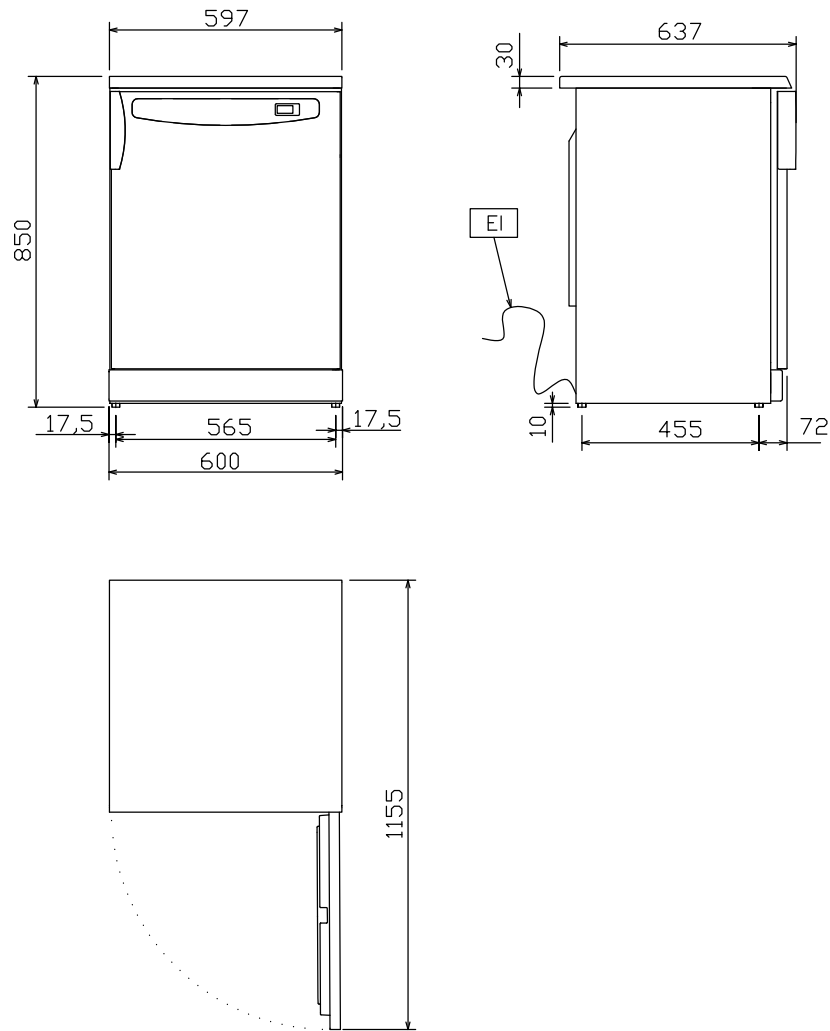


**LEGEND**

	RUCR16X1 727030	RUCR16W1 727046
EI - Electrical connection	230 V, 1, 50	230 V, 1, 50



www.zanussiprofessional.com

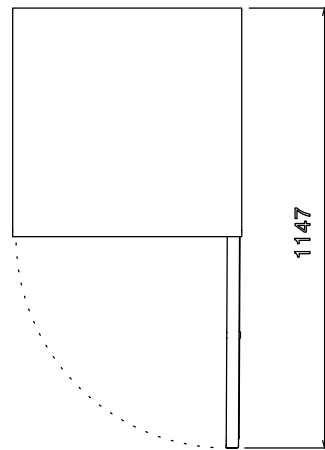
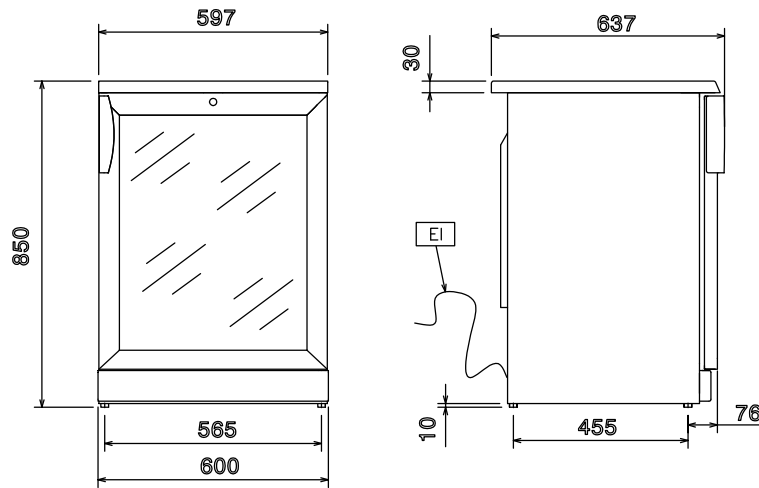


LEGEND

	RUCR16G1V 727031	RUCR16W1V 727047
EI - Electrical connection	230 V, 1, 50	230 V, 1, 50



www.zanussiprofessional.com

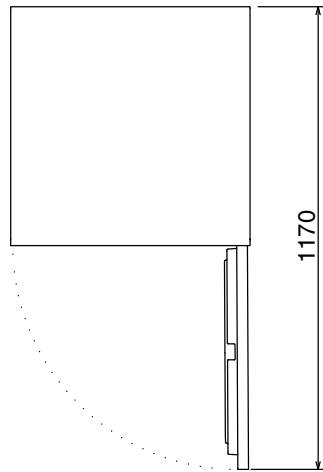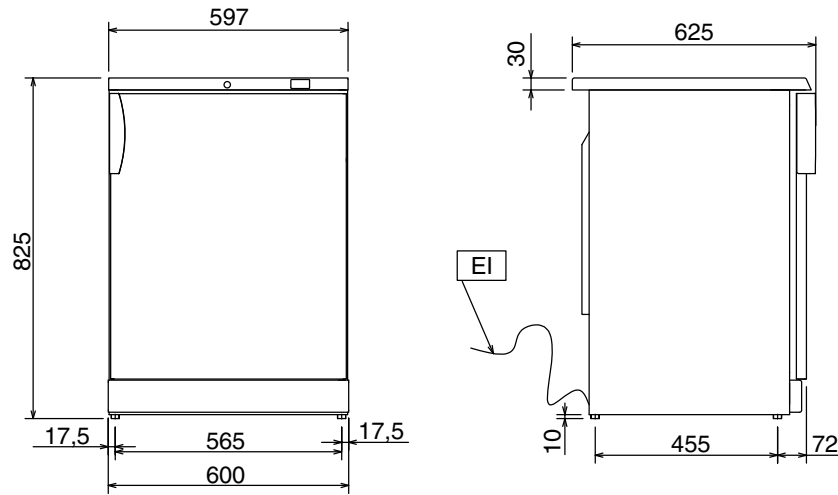

LEGEND

	RUCF16X1C 727228	RUCF16W1C 727222
EI - Electrical connection	230 V, 1, 50	230 V, 1, 50



www.zanussiprofessional.com